



GRC16W





GRC25W





GRC32W

// FEATURES



- » High Quality Aluminium Housing
- » Available in 16W,25W & 32W
- » Modern Design
- » High CRI 85+
- » IP40 Rating
- » Available in 3000K & 4000K
- » 5 Year 50,000hr Warranty

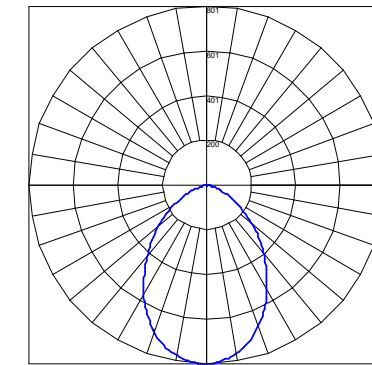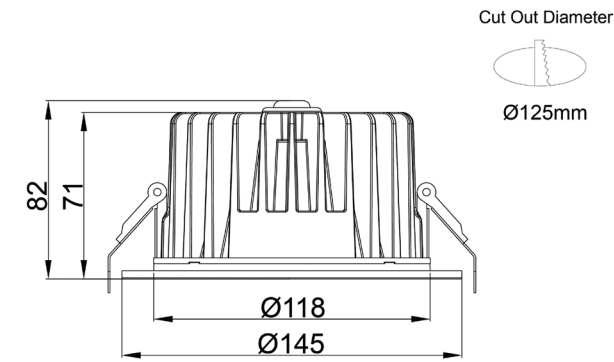

POLAR CURVE // GRCL-16W

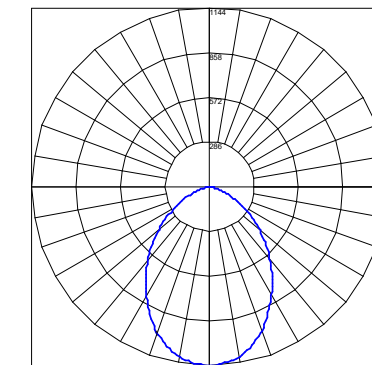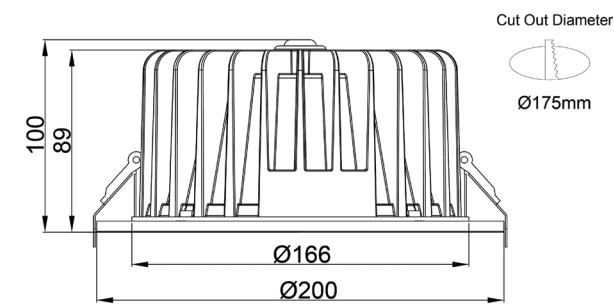

POLAR CURVE // GRCL-25W

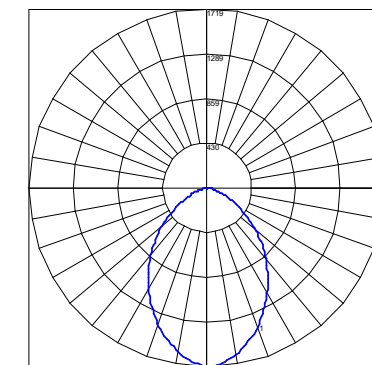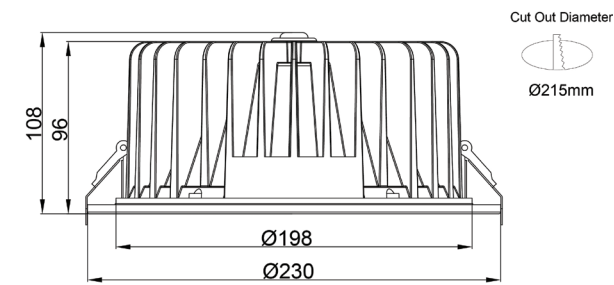

POLAR CURVE // GRCL-32W

COMPATIBLE WITH

- » **Dynalite Lighting Control Systems**  
Use Clipsal Trailing Edge Dimmer
- » **Clipsal C-Bus Lighting Control Systems**  
Use Clipsal Universal Dimmer

PRODUCT CODE	WATTAGE	FACE COLOUR	IP RATING	LUMEN OUTPUT	CRI	COLOUR TEMP	BEAM ANGLE
GRC16W-WW	16W	White/ Silver Ring	IP40	1286lm	85+	3000K- WW	84°
GRC16W-CW	16W	White/ Silver Ring	IP40	1432lm	85+	4000K- CW	84°
GRC25W-WW	25W	White/ Silver Ring	IP40	2025lm	85+	3000K- WW	84°
GRC25W-CW	25W	White/ Silver Ring	IP40	2299lm	85+	4000K- CW	84°
GRC32W-WW	32W	White/ Silver Ring	IP40	2960lm	85+	3000K- WW	84°
GRC32W-CW	32W	White/ Silver Ring	IP40	3161lm	85+	4000K- CW	84°