

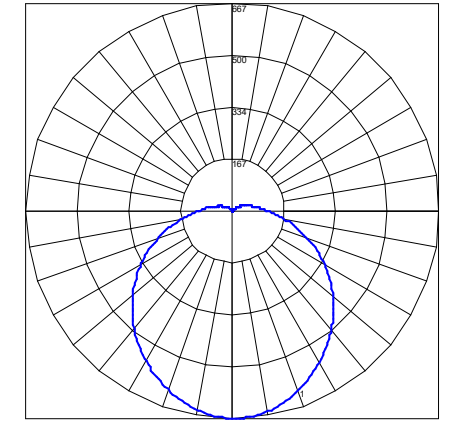


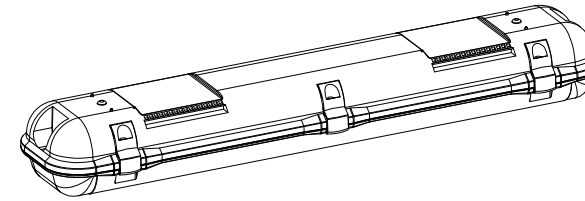

GRWB20W

//FEATURES

- » Available in 20W or 40W
- » IP65
- » 110° beam angle
- » CRI 80+
- » 1,700- 3,400 Lumens
- » 3 Year Warranty



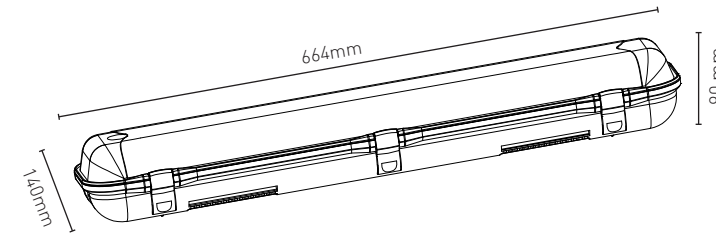


Maximum Candela = 667.283 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

POLAR CURVE // GRWB20W



GRWB40W

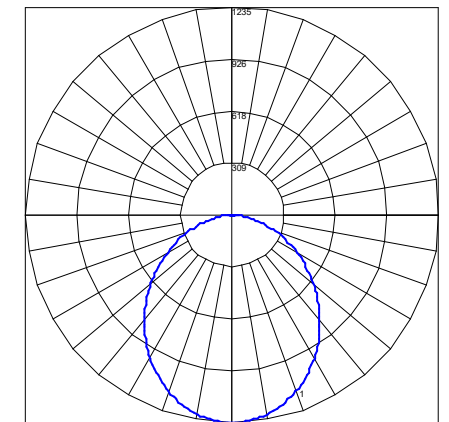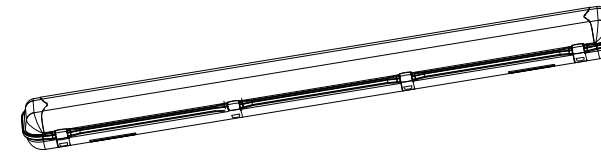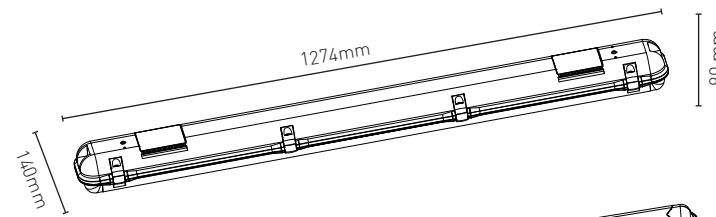

Maximum Candela = 1235.166 Located At Horizontal Angle = 90, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)

POLAR CURVE // GRWB40W

PRODUCT CODE	WATTAGE	IP RATING	LUMEN OUTPUT	CRI	Colour Temp	BEAM ANGLE	BEAM ANGLE
GRWB20W-WW	20W	IP65	1700lm	80+	3000k-WW	120°	120°
GRWB20W-CW	20W	IP65	1750lm	80+	4000K-CW	120°	120°
GRWB40W-WW	40W	IP65	3400lm	80+	3000k-WW	120°	120°
GRWB40W-CW	40W	IP65	3450lm	80+	4000K-CW	120°	120°